




Well Equipment International S.r.l.
Via Panini, 26/28 - 29017 Fiorenzuola d'Arda (PC)
Tel. +39.0523.983172 / 763203 - Fax +39.0523.942426
E-mail: info@wei.it - web: www.wei.it



4F-0174
6A-1215
7-1-0876
7K-0474
8C-0185
16A-0296

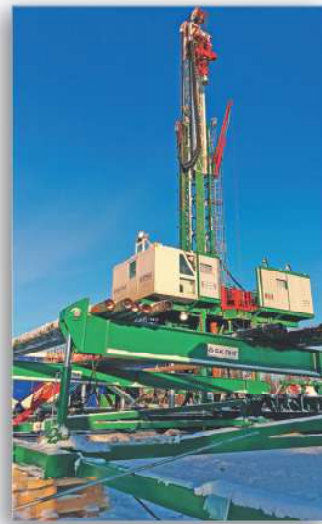

RATED CAPACITY

A

MAST	B
CLEAR WORKING SPACE	
MAX PULL UP	C
MAX PULL DOWN	D
POWER SWIVEL	E
MAX TORQUE 0-180 RPM	
JIB CRANE	F
DRILL LINE	G
RIG POWER UNIT	H
MUD PUMP	I

WEI DS205 SLIDING		
DP Size	Depth	
5"	3.600m -11.810ft	
4 1/2"	4.450m -14.600ft	
3 1/2"	6.100m -20.000ft	
16 m	52.5 ft	
205.000 daN	460.860 lbs	
25.000 daN	56.200 lbs	
3.900daNm	28.760 ftlb	
5.000 daN	11.240 lbs	
	To be required	
Diesel	1260 HP	
	To be required	

WEI DS205-22 LT SLIDING		
DP Size	Depth	
5"	3.600m -11.810ft	
4 1/2"	4.450m -14.600ft	
3 1/2"	6.100m -20.000ft	
22 m	72.2 ft	
205.000 daN	460.860 lbs	
25.000 daN	56.200 lbs	
3.900daNm	28.760 ftlb	
5.000 daN	11.240 lbs	
	To be required	
Diesel	2X 640 HP	
	To be required	

WEI DS230-17 E WORKOVER		
DP Size	Depth	
5"	3700m -12.140ft	
4 1/2"	4600m -15.100ft	
3 1/2"	6300m -20.700ft	
17m	55.7ft	
230.000daN	517.000lbs	
25.000 daN	56.200 lbs	
2.600daNm	19.170 ftlb	
5.000 daN	11.240 lbs	
	To be required	
Electric Engines	2x470 KW	
	To be required	

WEI may furnish a complete range of options as foam pump air lubricator system. Complete drilling equipment.

The main features are indicative.



WEI COMPLETE SERIES HYDRAULIC DRILLING RIGS



WEI DS250 LT SLIDING		
DP Size	Depth	
5"	4000m -13.120ft	
4 1/2"	5000m -16.400ft	
3 1/2"	6800m -22.310ft	
16 m	52.5 ft	
250.000 daN	562.000 lbs	
30.000 daN	67.440 lbs	
3.900 daNm	28.760ftlb	
5.000 daN	11.240 lbs	
	To be required	
Diesel	1500 HP	
	To be required	

WEI DS250 PL SLIDING OFFSHORE PLATFORM		
DP Size	Depth	
5"	4000m -13.120ft	
4 1/2"	5000m -16.400ft	
3 1/2"	6800m -22.310ft	
17.6 m	57.8 ft	
250.000 daN	562.000 lbs	
25.000 daN	56.200 lbs	
5.300 daNm	38.400 ftlb	
2.500 daN	5.620 lbs	
	To be required	
Electric Engines	2x563 KW	
	To be required	

WEI DS 272-22 LT SLIDING		
DP Size	Depth	
5"	5000m -16.400ft	
4 1/2"	6150m -20.100ft	
3 1/2"	8200m -26.900ft	
22 m	72.2 ft	
272.000 daN	610.000 lbs	
25.000 daN	56.200 lbs	
5.300 daNm	38.400 ftlb	
5.000 daN	11.240 lbs	
	To be required	
Diesel	2x750 HP	
	To be required	

WEI D340 32 LT		
DP Size	Depth	
5"	6.300m -20.670ft	
32 m	105 ft	
340.000 daN	750.000 lbs	
30.000 daN	67.440 lbs	
5.300 daNm	38.400 ftlb	
10.000 daN	22.500 lbs	
	To be required	
Diesel	2X 1125 HP	
	To be required	

ed 0419M





Well Equipment International S.r.l.
Via Panini, 26/28 - 29017 Fiorenzuola d'Arda (PC)
Tel. +39.0523.983172 / 763203 - Fax +39.0523.942426
E-mail: info@wei.it - web: www.wei.it



4F-0174
6A-1215
7-1-0876
7K-0474
8C-0185
16A-0296



WEI D5		
A	DP Size	Depth
	3 1/2"	140m - 460ft
	2 7/8"	180m - 590ft
B	4,5 m	15 ft
	5,000 daN	11.240 lbs
C	3,000 daN	6.740 lbs
D	600daNm	4.420ftlb
E	2,000 daN	4.490 lbs
F	2,000 daN	4.490 lbs
G		To be required
H	Diesel	124 HP
I	G.D.	4 1/2" x 5"



WEI D6		
A	DP Size	Depth
	3 1/2"	250m - 820ft
	2 7/8"	300m - 980ft
B	7 m	23 ft
	10,000 daN	22.480 lbs
C	3,000 daN	6.740 lbs
D	1,200daNm	8.840ftlb
E	2,000 daN	4.490 lbs
F	2,000 daN	4.490 lbs
G		To be required
H	Diesel	250 HP
I	WEI	6" x 5"



WEI D15		
A	DP Size	Depth
	3 1/2"	500m - 1640ft
	2 7/8"	680m - 2230 ft
B	7 m	23 ft
	15,000 daN	33.720 lbs
C	8,000 daN	17.980 lbs
D	1,600daNm	11.800ftlb
E	3,000 daN	6.740 lbs
F	3,000 daN	6.740 lbs
G		To be required
H	Diesel	320 HP
I	WEI	6" x 5"



WEI D40		
A	DP Size	Depth
	5"	630m - 2.070ft
	4 1/2"	780m - 2.560ft
B	9 m	29.5 ft
	40,000 daN	89.920 lbs
C	15,000 daN	33.720 lbs
D	2,300daNm	16.960ftlb
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	408 HP
I	WEI	6" x 5"-7 1/2" x 7"



WEI DR40 DUAL ROTARY		
A	DP Size	Depth
	5"	630m - 2.070ft
	RC 5" ID	400m - 1.310ft
B	8 m	26 ft
	40,000 daN	89.920 lbs
C	16,000 daN	35.970 lbs
D	2,300daNm	16.960ftlb
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	408 HP
I	WEI	6" x 5"-7 1/2" x 7"
ROTARY CASING DRIVE	30,000 daNm	221.260 ft-lb
MAX TORQUE 0-9RPM		
OPENING	610mm - 24"	
STROKE	3.8m - 12'6"	



WEI D40 S		
A	DP Size	Depth
	5"	630m - 2.070ft
	4 1/2"	780m - 2.560ft
B	8,6 m	28.2 ft
	40,000 daN	89.920 lbs
C	20,000 daN	44.960 lbs
D	2,800daNm	20.650ftlb
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	590 HP
I	WEI	6" x 5"-7 1/2" x 7"
CORING HEAD	450daNm@800rpm	
DUAL VICE TORQUE	8'000 daNm	59'000 ft-lb
OPENING	520mm - 20 1/2"	
STROKE	700 mm - 2'4"	



WEI D50s SUPER		
A	DP Size	Depth
	5"	1,000m - 3,280ft
	4 1/2"	1,150m - 3,770ft
B	13 m	42.5ft
	56,000 daN	125.890 lbs
C	20,000 daN	44.960 lbs
D	2,800daNm	20.650ftlb
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	408 HP
I	WEI	7 1/2" x 7"

RATED CAPACITY	
A	
B	
C	
D	
E	
F	
G	
H	
I	

WEI may furnish a complete range of options as foam pump air lubricator system. Elevators, pipe handling, power tongs and complete drilling equipment.

The main features are indicative.



WEI D50 S SLANT		
A	DP Size	Depth
	5"	1,000m - 3,280ft
	4 1/2"	1,150m - 3,770ft
B	13 m	42,5 ft
	50,000 daN	112.400 lbs
C	18,000 daN	40.460 lbs
D	2,800daNm	20.650ftlb
E	3,000 daN	6.740 lbs
F	3,000 daN	6.740 lbs
G		To be required
H	Diesel	408 HP
I	WEI	7 1/2" x 7"

WEI D75 S SLANT		
A	DP Size	Depth
	5"	1,500m - 4,920ft
	4 1/2"	1,720m - 5,640ft
B	16 m	52.5 ft
	75,000 daN	168.600 lbs
C	15,000 daN	33.720 lbs
D	2,800daNm	20.650ftlb
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	500 HP
I	WEI	7 1/2" x 7"

WEI D75 SL-EL SLANT/HELI-TRANSPORT		
A	DP Size	Depth
	5"	1500m - 4,920ft
	4 1/2"	1720m - 5,640ft
B	16 m	52.5 ft
	75,000 daN	168.600 lbs
C	15,000 daN	33.720 lbs
D	2,800daNm	20.650ftlb
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	500 HP
I	WEI	7 1/2" x 7"

WEI E175		
A	DP Size	Depth
	5"	1500m - 4,920ft
	4 1/2"	1720m - 5,640ft
B	16 m	52.5 ft
	75,000 daN	168.600 lbs
C	20,000 daN	44.960 lbs
D	2,800daNm	20.650ftlb
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	500 HP
I	WEI	7 1/2" x 7"

WEI D90		
A	DP Size	Depth
	5"	1700m - 5,600ft
	4 1/2"	2,150m - 7,050ft
B	16 m	52.5 ft
	90,000daN	202.300 lbs
C	20,000 daN	44.960 lbs
D	2,800daNm	20.650ftlb
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	500 HP
I		To be required

DS100 SLIDING		
A	DP Size	Depth
	5"	1900m - 6,300ft
	4 1/2"	2,400m - 7,875ft
B	16 m	52.5 ft
	100,000daN	224.800 lbs
C	20,000 daN	44.960 lbs
D	3,450daNm	25.440ftlb
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	630 HP
I		To be required

WEI D100 SL-EL SLANT/HELI-TRANSPORT		
A	DP Size	Depth
	5"	1900m - 6,300ft
	4 1/2"	2,400m - 7,875ft
B	16 m	52.5 ft
	100,000daN	224.800 lbs
C	20,000 daN	44.960 lbs
D	3,450daNm	25.440ftlb
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	630 HP
I		To be required

WEI DS150 SLIDING		
A	DP Size	Depth
	5"	2800m - 9,186ft
	4 1/2"	3,500m - 11,480ft
B	16 m	52.5 ft
	150,000 daN	337.210 lbs
C	22,000daN	44.960 lbs
D	3,450daNm	25.440ftlbs
E	4,000 daN	8.990 lbs
F	4,000 daN	8.990 lbs
G		To be required
H	Diesel	850 HP
I		To be required